


Technical Specification



EIA WRD	WRD350
Frequency Range(GHz)	3.5-8.2
Coupling(dB)	50
Coupling Accuracy(dB)	±1.5
Frequency Sensitivity(dB)	±1.5
Directivity(dB)	30 Min.
Mainline VSWR	1.25 Max.
Secondline VSWR	1.50 Max.
Flange	FPWRD350D24
Coupling Port	N-Female
Material	Al
Net Weight(Kg)	3.22 Around


Outline Drawing (Size: mm)

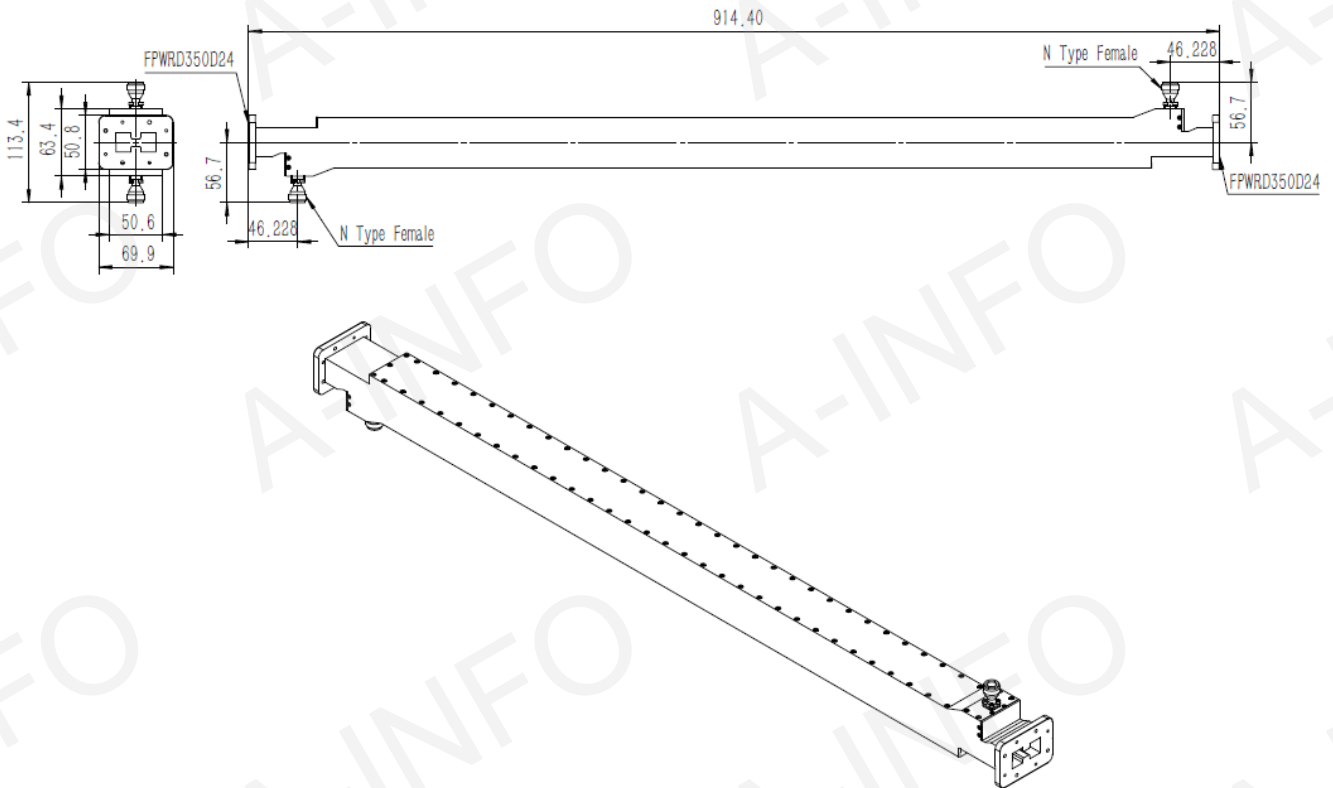

Flange Drawing (Size: mm)


FPWRD350D24

(With four through mounting holes
and four screws holes)

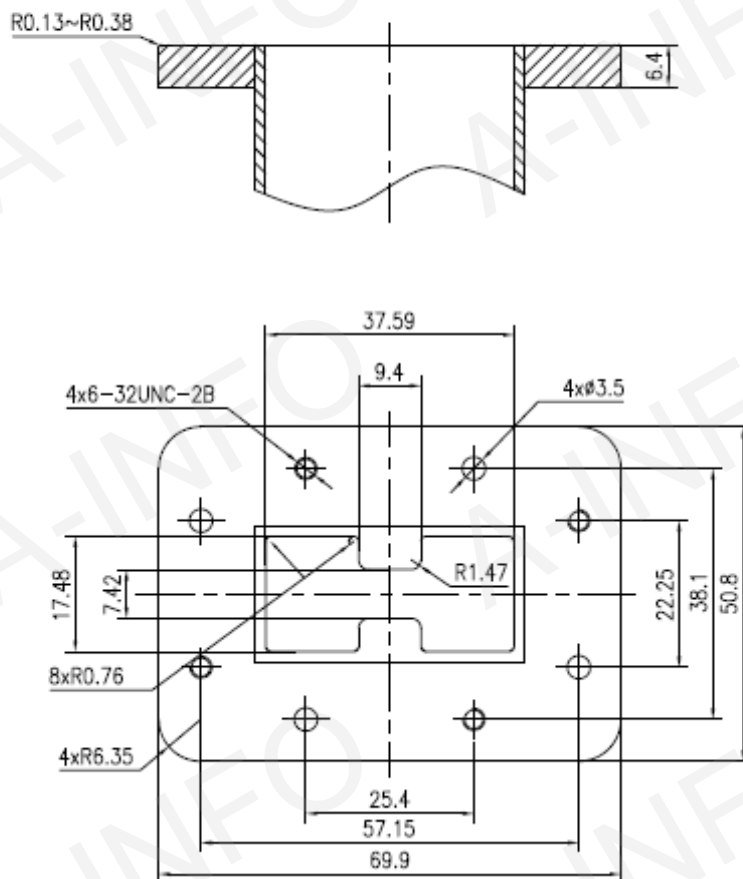


Test Results


Coupling
Port 1

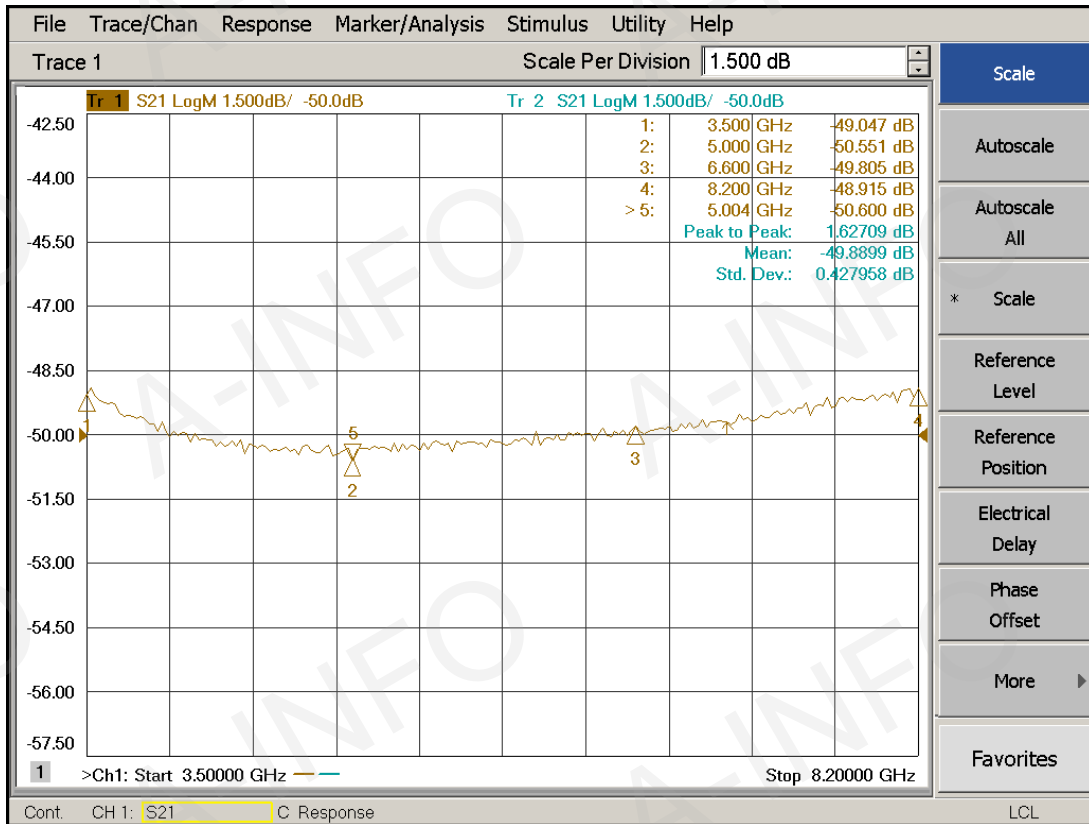


Port 2

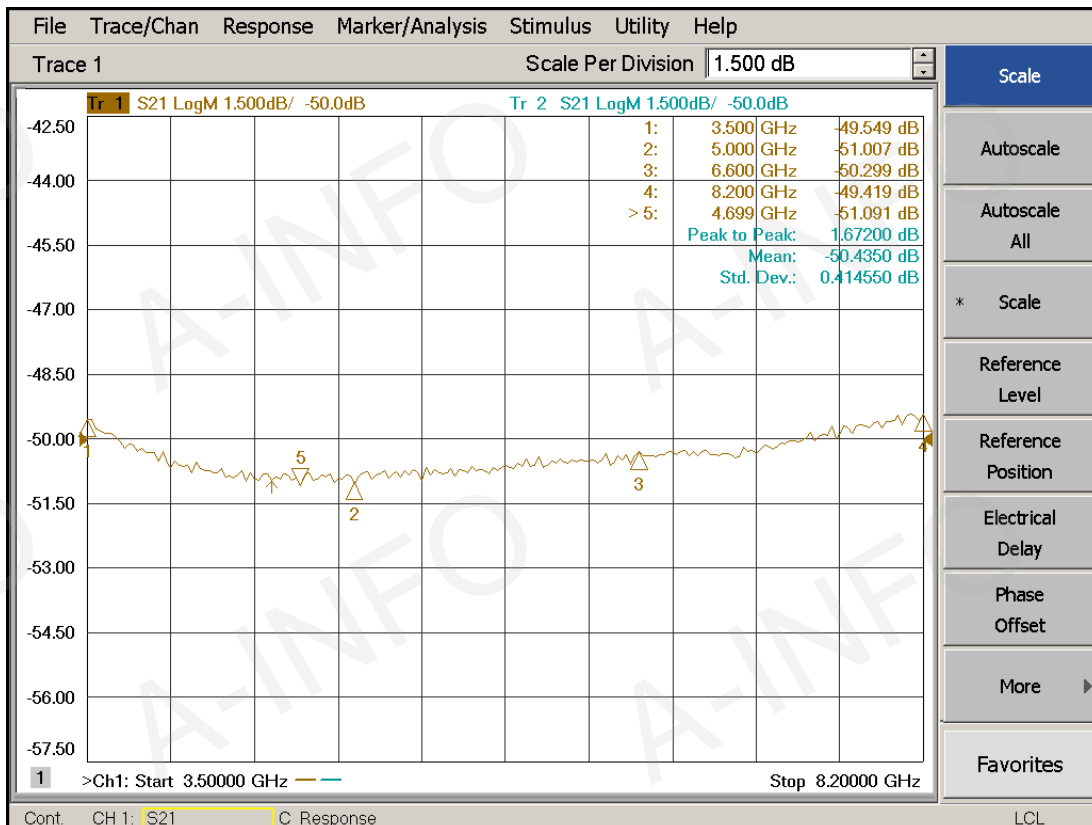


Directivity
Port 1

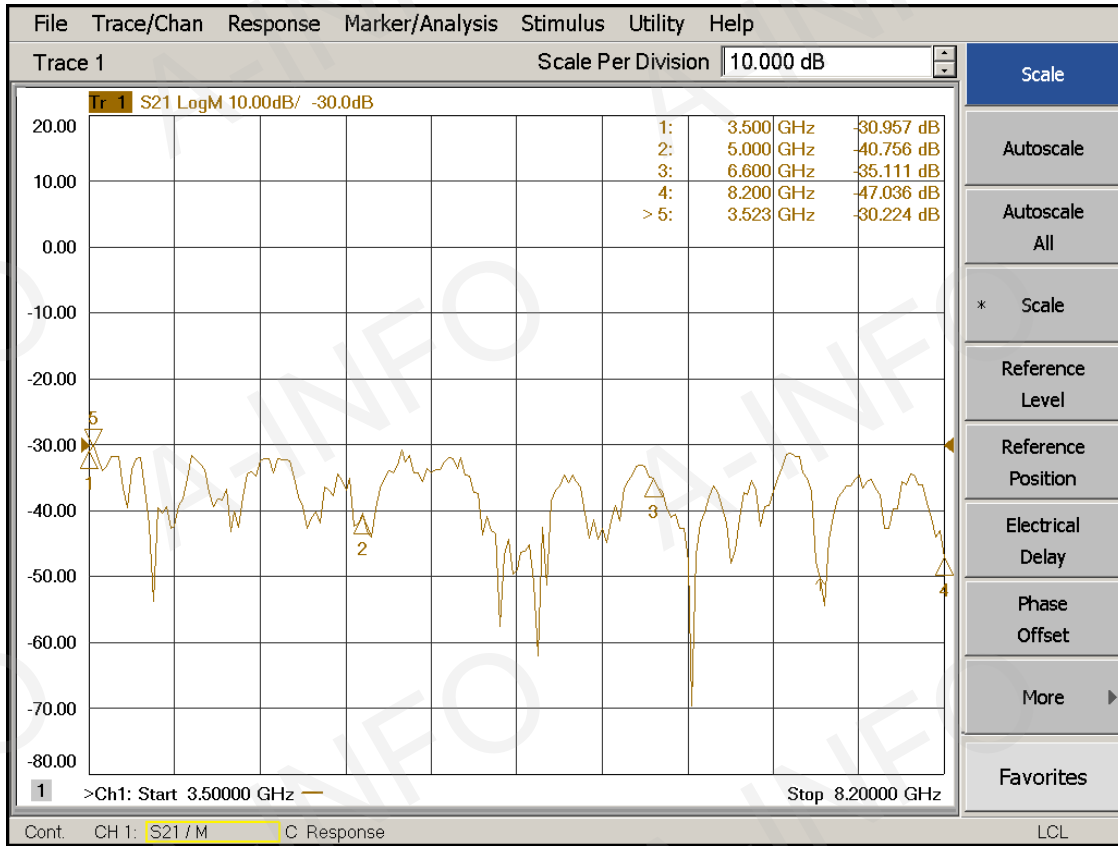

Port 2

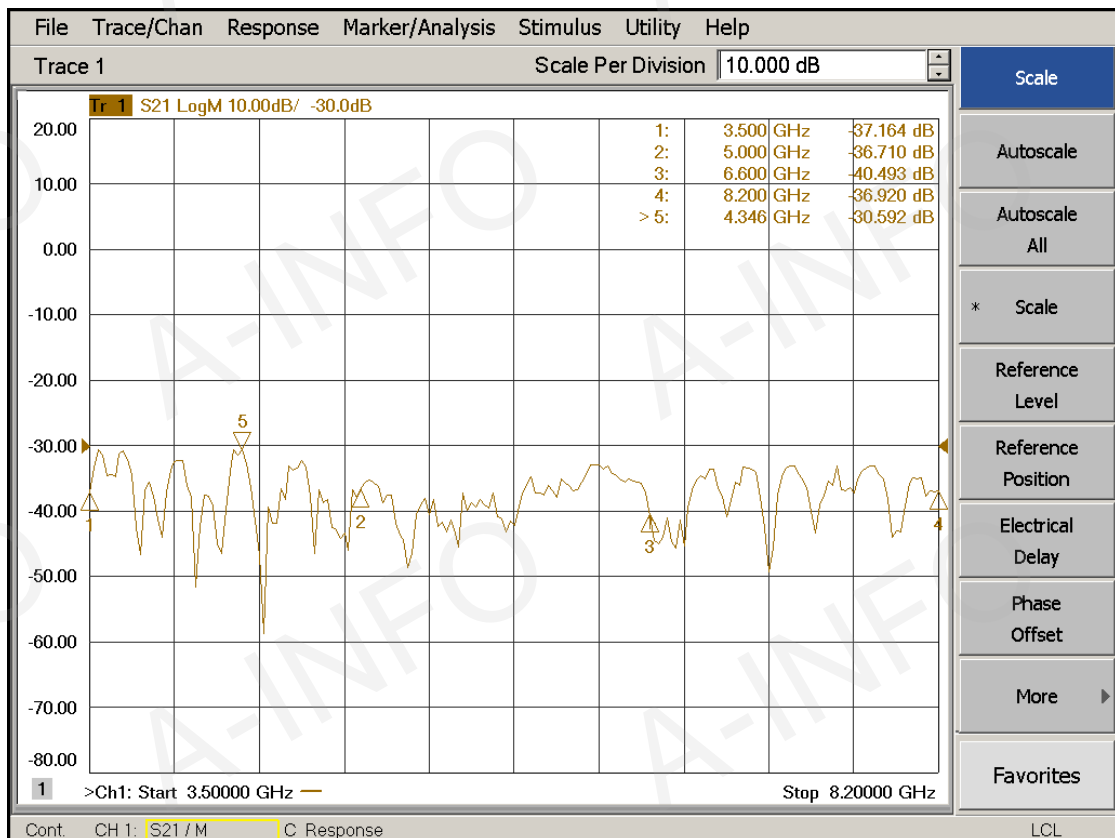


Mainline VSWR

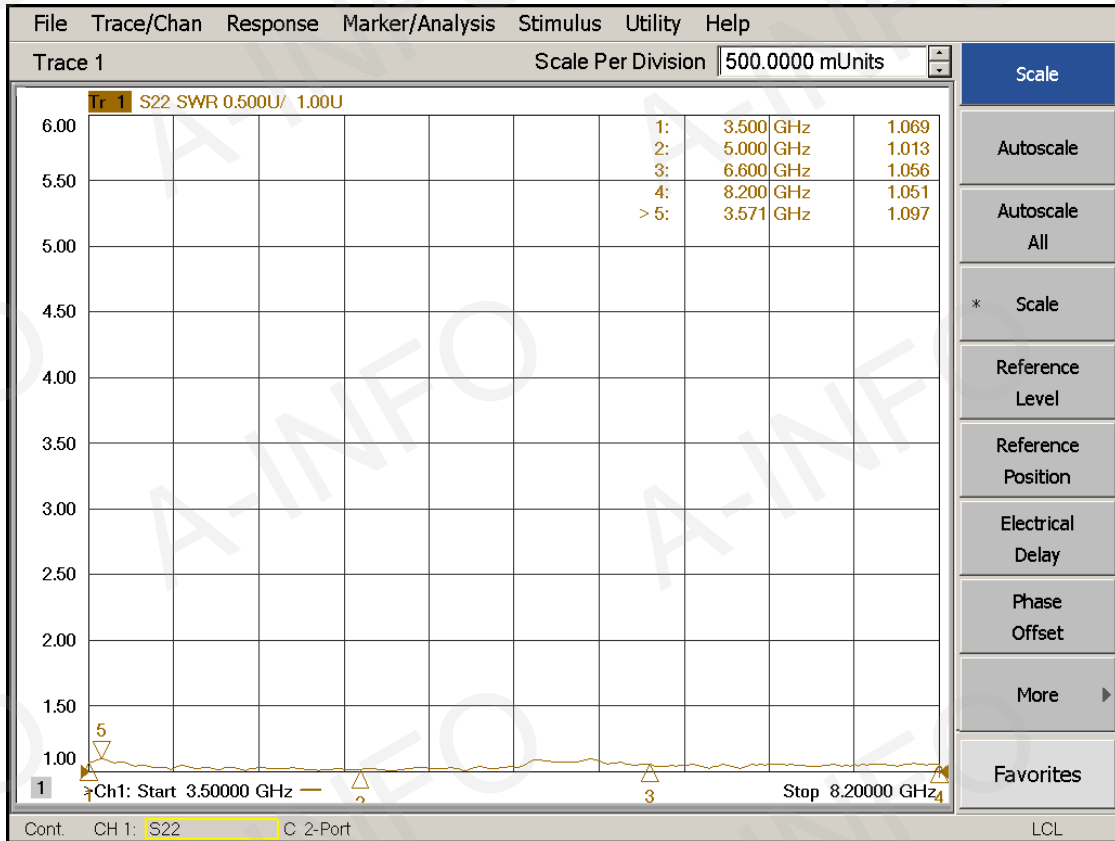

Secondline VSWR

Port 1

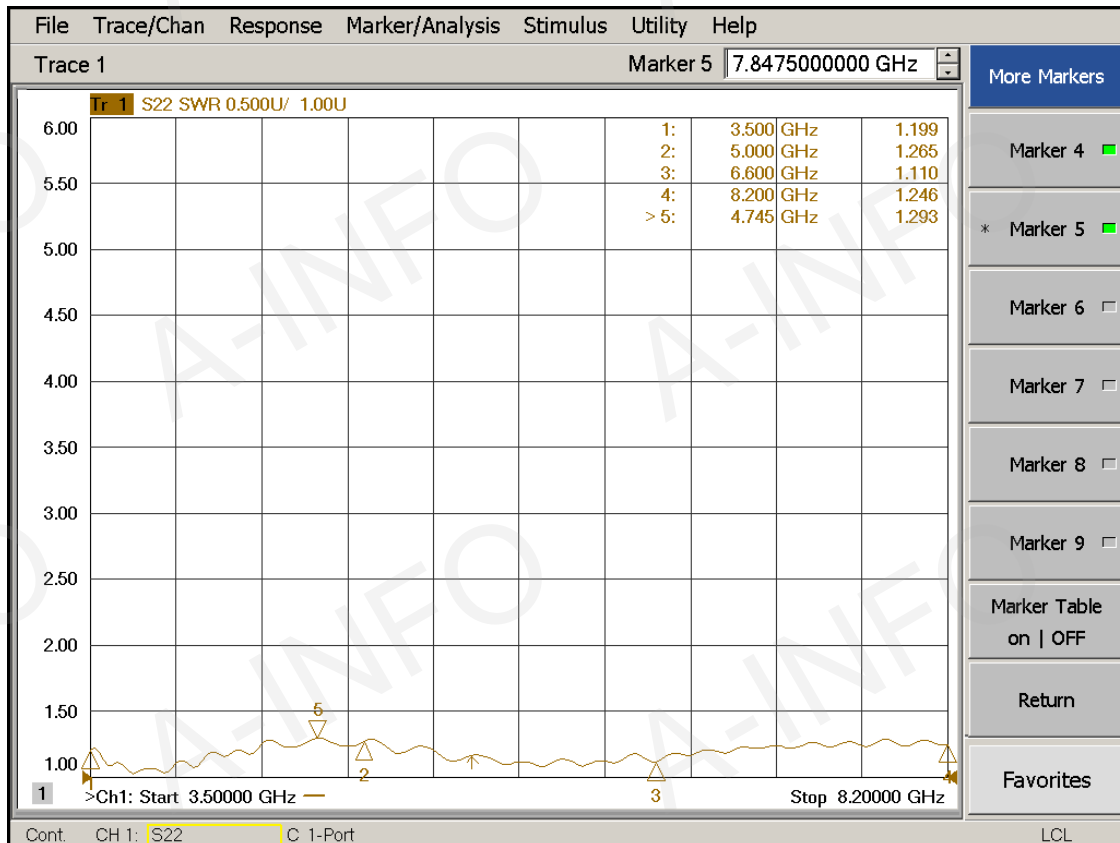

Port 2

